

Product code


VP36809



16A 3P+N+E Interlocked Switched Sockets with room for MCB IP44

★ Rated current: 16A
★ Rated voltage: AC 380-415V~
★ No. of poles: 5
★ Earth contact position: 6H
★ Color: Red
★ Protection degree: IP44
★ Housing material: Flame Retardant PA6 RoHS Reach
Contact: nickel-plated brass RoHS Reach
★ Operation Temperature: -25°C~+40°C
★ Certificates: CE,ISO9001:2008,RoHS,REACH
★ Standards: IEC/EN60309-4, IEC/EN60309-1,IEC/EN60309-2

- > RAL 7035 grey, housing made of insulating material;
- > Flame and fire resistance, the base overcome the glow wire test at 850 centigrade;
- > Mechanical interlock enabling the switch to be operated only when it's plug-in, the plug can only be pulled out when the switch is on "O";
- > Switch with handle which can be padlocked from outside in position "O" and "I";
- > Switch is in compliance with IEC 60947-3, usable AC 21,AC 22, AC 23;
- > Mechanical protection degree is IK8.

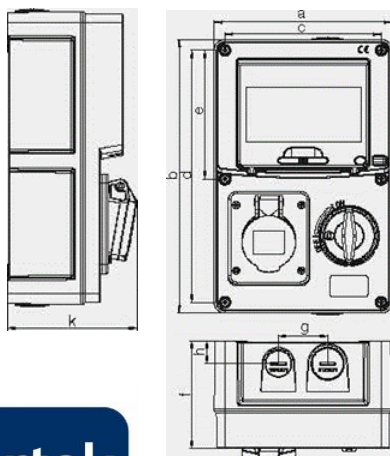

Current	16A			32A		
	Pole 3	4	5	3	4	5
a	166	166	166	166	166	166
b	255	255	255	255	255	255
c	146	146	146	146	146	146
d	235	235	235	235	235	235
e	120	120	120	120	120	120
f	100.5	100.5	100.5	100.5	100.5	100.5
g	46	46	46	46	46	46
h	21.5	21.5	21.5	21.5	21.5	21.5
k	112.1	115.3	115.6	121.4	121.4	122.6
Cable size(mm ²)	1.5-4			2.5-10		