




Product code

VP36209

16A 3P+N +E Interlocked Switched Sockets IP67

| |
|---|
| ★ Rated current: 16A |
| ★ Rated voltage: 380-415V |
| ★ No. of poles: |
| ★ Earth contact position: 6H |
| ★ Color: Blue |
| ★ Protection degree: IP67 |
| ★ Housing material: Flame Retardant PA6 RoHS Reach |
| Contact: nickel-plated brass RoHS Reach |
| ★ Operation Temperature: -25°C~+40°C |
| ★ Certificates: CE,ISO9001:2008,RoHS,REACH |
| ★ Standards: IEC/EN60309-4, IEC/EN60309-1,IEC/EN60309-2 |

- > RAL 7035 grey, housing made of insulating material;
- > Flame and fire resistance, the base overcome the glow wire test at 850 centigrade;
- > Mechanical interlock enabling the switch to be operated only when it's plug-in, the plug can only be pulled out when the switch is on "O";
- > Switch with handle which can be padlocked from outside in position "O" and "I";
- > Switch is in compliance with IEC 60947-3, usable AC 21,AC 22, AC 23;
- > Mechanical protection degree is IK8.

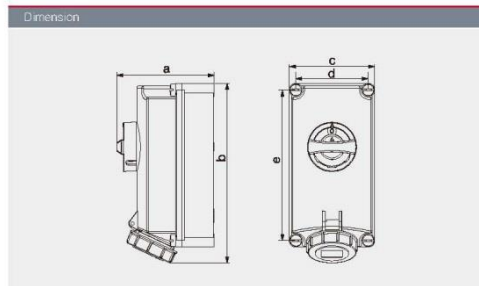

| Current | 16A | | | 32A | | |
|------------------------------|-------|-------|-------|--------|-------|-------|
| | 3 | 4 | 5 | 3 | 4 | 5 |
| a | 135.8 | 135.8 | 135.8 | 142.5 | 142.5 | 147 |
| b | 248 | 248 | 248 | 256.5 | 256.5 | 256.5 |
| c | 119 | 119 | 119 | 119 | 119 | 119 |
| d | 101 | 101 | 101 | 101 | 101 | 101 |
| e | 208 | 208 | 208 | 208 | 208 | 208 |
| Cable size(mm ²) | 1.5-4 | | | 2.5-10 | | |